





HIGH QUALITY NANOTECHNOLOGY CERAMIC COATING FOR ENGINES (4-stroke, 2-stroke, fuel, gasoline), GEAR BOX (manual), DIFFERENTIALS, CHAINS, BEARINGS, SHOCK ABSORBERS, HYDRAULIC SYSTEMS. IN GENERAL: ALL KIND OF LUBRICATION

Ceracoat Group / Flawilerstrasse 31 / CH-9500 WIL / Switzerland
www.ceracoat.me / phone +41 71 288 17 17 / info@ceracoat.me

Conventional Engine

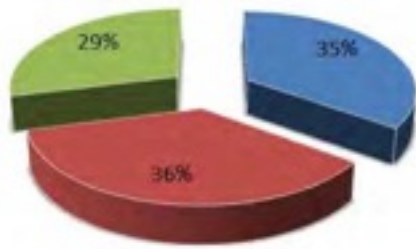

Ceramic Coated Engine

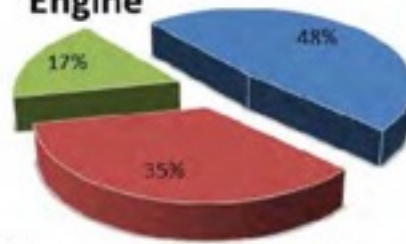

■ Useful energy ■ Exhaust energy ■ Coolant energy ■ Useful energy ■ Exhaust energy ■ Coolant energy



CERACOAT CERAMIC COATING FOR ENGINES:

- Is a coating by solid ceramic particles, to be added to greases, hydraulic-oils, gear-oils, engine-oils, etc. in order to reduce friction and wear in a spectacular way.
- The ceramic solid particles do not build any agglomerates, and do not block filters. The solid polar particles have a disc structure and therefore an extremely good adhesion to the metal surface, building a film-like ceramic layer on the piston rings and the cylinder walls, reducing friction + wear in the engine. No more friction between metal at cold start (no lubrication yet) because of the protectant ceramic film.

EXAMPLES OF USE:


- Engines (cars, trucks, tractors, machines, airplanes, bikes, boats)
- Gears (also for windmills)
- Shock absorbers
- Bearings, hydraulic systems
- Everywhere where you have oil and/or grease for lubrication

PRODUCT CHARACTERISTICS:


- Ceramic concentrate based on nanotechnology, foodstuff neutral (inert)
- Ceramic natural material builds a film on the metal parts of the engine
- Ceramic reduces friction, wear, temperature, fuel & oil consumption
- No oil change needed to add it – film remains after oil changes

Ceracoat Group / Flawilerstrasse 31 / CH-9500 WIL / Switzerland
www.ceracoat.me / phone +41 71 288 17 17 / info@ceracoat.me

Conventional Engine

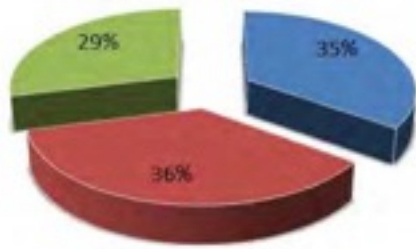

Ceramic Coated Engine

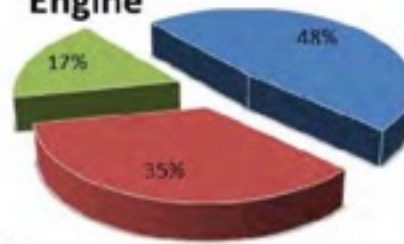

■ Useful energy ■ Exhaust energy ■ Coolant energy ■ Useful energy ■ Exhaust energy ■ Coolant energy



OTHER PROPERTIES:

- ☒ Much better friction coefficient than PTFE, any other material or the oil
- ☒ Much higher heat transfer coefficient than PTFE, any other material or the oil
- ☒ Works until an operating temperature of 1800 °C (PTFE only 260 °C)
- ☒ Reduction of friction means: less wear, consumption, exhaust emission, noise, temperature, vibrations, elimination of the cold start problem of missing lubrication
- ☒ Reduction of friction means: more efficiency (more power/torque), longer service intervals, increases engine lifetime – protection during cold starts + lubrication fails

APPLICATION:

Simple do-it-yourself application makes it suitable for end-customers as well:

Just add it to the warm engine oil and immediately drive the car for about 15 minutes

This CERAMIC-coating does quickly adhere to the metal parts of the engine

STORAGE STABILITY:

Unopened original containers can be stored for at least 10 years. Shake the bottle when the product was stored a long time before use


CONSUMPTION:

1 bottle for up to 6 liters of engine oil – 1 bottle for about 50 000 km or once a year


Ceracoat Group / Flawilerstrasse 31 / CH-9500 WIL / Switzerland

www.ceracoat.me / phone +41 71 288 17 17 / info@ceracoat.me

Conventional Engine

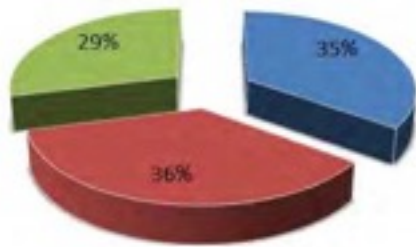

Ceramic Coated Engine

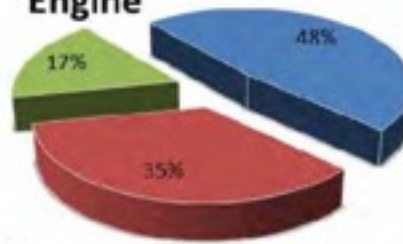

■ Useful energy ■ Exhaust energy ■ Coolant energy ■ Useful energy ■ Exhaust energy ■ Coolant energy



ADVANTAGES COMPARED TO COMPETITIVE PRODUCTS

☒ Permanence and longevity:

The ceramic engine coating is active for about 50 000 km and since it is a coating and not an oil additive, it is still active after oil changes

Many competitive products have to be added after each oil change and do not adhere to the metal parts because they are just oil additives

☒ Abrasion resistant, temperature resistant

A solid connection from the ceramic material to the metal parts of the engine builds a permanent ceramic film on the metal parts. Abrasion/friction will not affect the ceramic film for about 50 000 km and ceramic is temperature resistant until 1800 °C

Many competitive products are quickly destroyed by friction and temperature (So, the working range of PTFE for example is only about 260°C)

☒ No chemical product

Ceramic is a natural product that people are using all day long in many other fields

Many competitive products are chemicals, and PTFE is transformed in CFC (poison) by heat


IMPORTANT NOTICE:

Our explanations correspond to our current knowledge and experience. The right to make alterations within the framework of technical advances and operational development is reserved. The customer is not released from careful product application. We guarantee the quality of our products in accordance with our general sales conditions as a matter of course. The products are ready-to-use.


Ceracoat Group / Flawilerstrasse 31 / CH-9500 WIL / Switzerland
www.ceracoat.me / phone +41 71 288 17 17 / info@ceracoat.me

TESTING RESULTS:

Conventional Engine

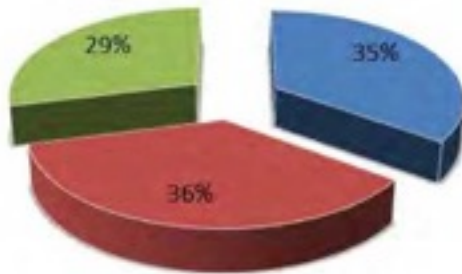

Ceramic Coated Engine

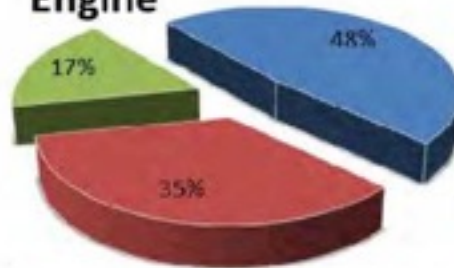


■ Useful energy ■ Exhaust energy ■ Coolant energy ■ Useful energy ■ Exhaust energy ■ Coolant energy

<i>All figures for Ceracoat ceramic</i>	Up to
Improves considerably	
Engine life	100%
Engine power	~15%
Engine elasticity	
Cold start	
Reduces considerably	Up to
FRICITION	35%
Engine wear	84%
Oil temperature + consumption	20%
Fuel consumption	10%
Exhaust gas emissions	85%
Noise	5dB
Stick-Slip	100%
Stops oilleak	

**Measurement of engine power by the University of
 Arnheim and Measurement of consumption by the
 University of Eindhoven due to
CERACOAT ceramic -
 Physical properties and comparison of
CERAMIC and PTFE (Teflon[®])**

Power without Ceracoat ceramic	power With Ceracoat ceramic	Starting power without Ceracoat ceramic	Starting power with Ceracoat ceramic
101,8 kw	106,0 kw	240 Amp	225 Amp
105,6 kw	111,3 kw	330 Amp	285 Amp
214,6 kw	221,5 kw		
320,9 kw	334,8 kw		
Fuel economy w. Ceracoat ceramic	Over 1812 mls - 4,2 %	Over 3556 mls - 4,6 %	Over 4528 mls - 4,9 %
Fuel economy w. Ceracoat ceramic	Normal roads - 10 %	Hill roads - 6,5 %	highway - 5,8 %

Density of ceramic	Ca. 0,9 Kg/L – liquid
Odour + colour of ceramic	Light + white/yellow
Ceramic particles volume	0,1 – 0,5 Micron
Flash point of ceramic	over 230° C
Auto-ignition point of ceramic	over 260° C
Water solubility of ceramic	Insoluble
Viscosity of ceramic	Thick liquid
Temperature of action by ceramic	-20 to -1800 ° C

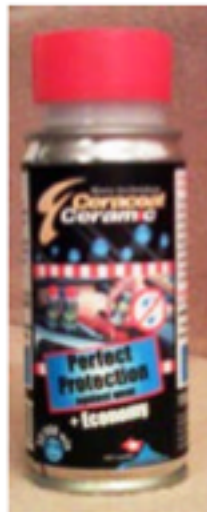

Comparison	CERAMIC	PTFE = Teflon [®] (*registered trade mark from Du Pont de Nemours)
Friction coefficient	0,01 – 0,1	0,04 – 0,5
Heat transfer coefficient	40-70 W/K.m	0,24 W/K.m
Hazardous combustion products	None	dangerous CFC
Bonding to metal	Excellent	Non
Polarity	Polar	non polar
Transition	over 1100° C	decomposed after 260° C
Max operating Temperature	-1800 ° C	260° C

★ Is a registered Trade Mark of DuPont Company



ORIGINAL

003044

Seen by the
Chamber of Industry and Commerce
of Thurgovia
Bäumli & Weyrer AG
Weinfelden (Switzerland), 2014-09-24

Hei Elio, (This is just a GREAT result and should open you all markets!)

1. Truck Cars.

The temporary results from the truck I mentioned last week show that the fuel consumption has been reduced by 15% (!!). From 6,2 litres per 10km to 5,3 litres per 10km. The truck also had an oil leakage - about 1 litre per day. After the coating there is no oil leakage at all.

The truck is busy 6 days a week from early morning to late evening with transporting rocks out of a tunnel. The owner says he saves about €600 per week in diesel - €2 400 per month. He also saves a little fortune of oil every month. Attached is a photo of the exact truck.



AND IN ADDITION WITH CERACOAT SPEED ENGINE CLEANER:

Testing results of **CERACOAT** ceramic *Speed Engine Cleaner*

Client	First Results Of C1 – C2	Results with Ceracoat ceramic	Reduction of exhaust emission with Ceracoat ceramic Speed Engine Cleaner
Renault	4,51	2,05	55 %
Bosch	3,51	1,55	56 %
Technic Service	2,96	0,94	68 %
Dekra	3,28	0,52	84 %
Opel	4,67	2,10	55 %
Opel	4,39	1,32	70 %
Renault	3,27	0,76	77 %
VAG	3,97	0,71	82 %
Bosch	1,40	0,20	86 %
Norauto	2,80	1,10	61 %
Pansier Brandt	8,49	1,95	77 %
Ferrari	0,80	0,31	63 %
Citroen	4,90	1,00	80 %

